


TA9090HD-RR-2424

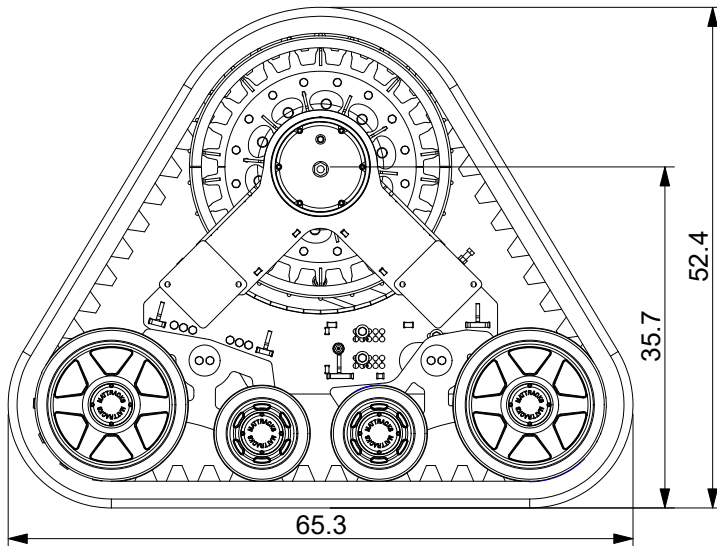

CORNERS	4
EXCLUSIVE ANTI-TORQUE SYSTEM	Rubber Torsion
FRAME CONSTRUCTION	Steel
RECOMMENDED MAX GROSS	50,000 lbs
ASSEMBLY WEIGHT	7,700 lbs
INTERNAL SUSPENSION	Concentric Pivot with Rocker Arm
TRACK TREAD WIDTH	24 in
TREAD STYLE	All-Terrain, Self-Cleaning
TRACK MATERIAL	Rubber with Heavy Duty Internal Rods and Cord
RECOMMENDED OPERATING TEMPERATURE	(Ambient) -40° to +130°
AXLE HEIGHT	35.7 in
GROUND CONTACT LENGTH PER CORNER	(Hard Surface) - 43.8 in min (Soft Surface) - 65.3 in max
GROUND CONTACT SURFACE AREA	(Hard Surface) - 4,205 in ² min (Soft Surface) - 6,269 in ² max
SPROCKET DIAMETER	29 in
WHEELS (SHIELDED & SEALED BEARING) PER CORNER	(6) 4.5"x10", (6) 4.5"x16" Heavy Duty, Industrial Seals (12/corner, 3 rows)
RECOMMENDED MAX SPEED**	15 mph
TURNING RADIUS	Same as original vehicle
MAX OPERATING SIDE SLOPE (GRADE)*	25%
TERRAIN	All-Terrain Including Hard Surface at GVW

*DEPENDENT ON VEHICLE, CARGO, AND ACCESSORIES **SOME VEHICLES MAY REQUIRE SLIGHT ALTERATIONS
ALL SPECIFICATIONS ARE APPROXIMATE AND WE RESERVE THE RIGHT TO MAKE CHANGES OR MODIFICATIONS WITHOUT NOTIFICATION