


MATTRACKS
Track-Tor-Assist™ 3500
4 WD & FRONT ASSIST TRACTORS

Custom designed to fit most
4 wheel drive and front wheel
assist tractors 35 to 50 HP.



Retains 4 WD status w/tracks

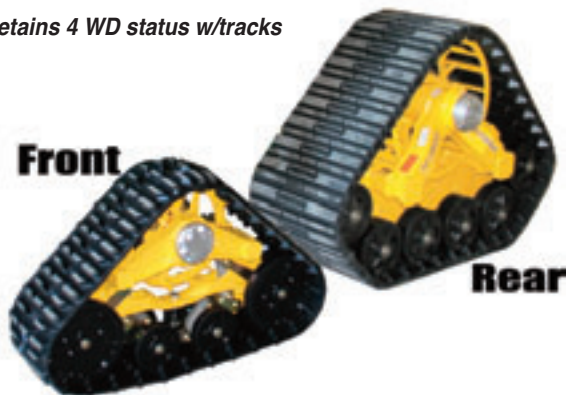

SPECIFICATIONS

Exclusive Anti -Torque System	Rubber Torsion - Anti Torque
Frame Construction	Aluminum Front - Steel Rear
Assembly Weight	1,160 lbs. (525 kg) typical
Type of Vehicle***	35 to 50 horse power
Recommended Max. Gross Wt.	7,000 lbs. (3,175 kg) GVW, Ft. - 1,800 lbs (815 kg), Rr. - 5,200 lbs. (2,360 kg)
Internal Suspension	Ft. - Concentric Pivot w/ Adjustable Spring Rocker Arm, Rr. - Concentric Pivot w/ Adjustable Rocker Arm
		<i>(Smooth ride with minimum change to track tension, resulting in minimal heat buildup)</i>
Track Tread Width	Front 11 in., Rear 16 in. (Front 280 mm, Rear 406 mm)
Tread Style	All-Terrain, Self-Cleaning Lug, Quiet, Highly Efficient
Track Material	Specially Formulated Rubber Compound with Internal Reinforced Composites
Overall Width (Outside to outside of tracks)	Depends on tractor model
Recommended Operating Temperature	(Ambient) -38° F to +130° F (-40° C to +55° C)
Overall Width Increase from Standard*	15 in. to 20 in. (380 mm to 508 mm)
Ground Contact Length [typical]:		
(Hard Surface)	Front 24 in., Rear 30 in. (Front 610 mm, Rear 762 mm)
(Soft Surface)	Front 36 in., Rear 52 in. (Front 914 mm, Rear 1,320 mm)
Ground Contact Surface Area	1,480 sq. in. min. (9,600 sq. cm min.) 2,456 sq. in. max. (15,835 sq. cm max.)
Ground Pressure	1.5 to 4 psi depending on tractor
Gear-Reduction	25 to 50% depending on original tire size.
Wheels (Double Shielded and Sealed Bearing)	Ft.- 1 in. x 10-6 in., Rr. - 8 in. x 2.5 in. HD extra seals (8 Front, 12 Rear /corner, 2 rows)
Wheel Material	UHMW and Rubber
Paint (color)	Yellow-Standard Optional: Other Colors, E Coat Corrosion, Resistance

PERFORMANCE

Recommended Max. Speed**	20 mph (30km/h)
Turning Radius	Same as original vehicle
Approach Angle*	Up to 90°
Departure Angle*	Up to 80°
Grade Capacity*	100%
Side Slope Capacity	68%
Terrain - All Terrain Including Hard Surface	@ 7,000 GVW (3,150 kg)
Maximum Distance Off Road	Indefinite
Maximum Distance Hard Surface**	@ Below 80°F (26°C) and light GVW: indefinite @ Above 80°F (26°C) and light GVW: 15 miles @ 20 mph (25 km @ 30 km/h) @ Above 80°F (26°C) @ GVW: 5 mile @ 20 mph (8 km @ 30 km/h)

NOTE: Certain tractors may require some trimming of body parts.

*Depending on vehicle **For maximum tread life
***Some vehicles may require slight alterations.

ALL SPECIFICATIONS ARE APPROXIMATE, YOUR VEHICLE'S
PERFORMANCE MAY DIFFER. WE RESERVE THE RIGHT TO MAKE
CHANGES OR MODIFICATIONS WITHOUT NOTIFICATION

2-4-08 Copyright Mattracks Sales, Inc., Karlstad, MN